


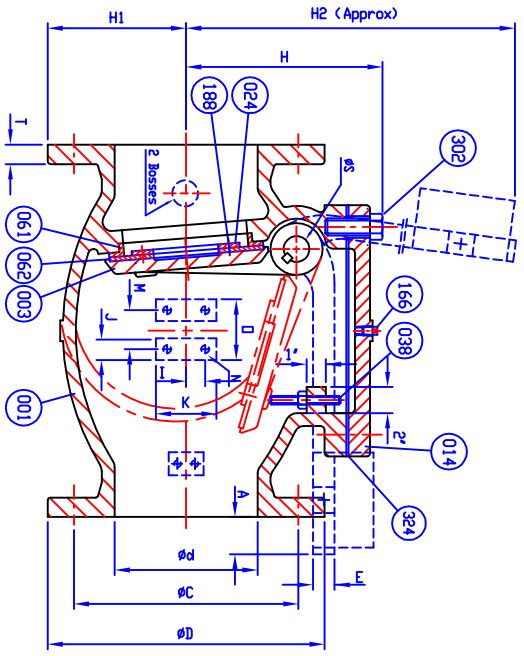
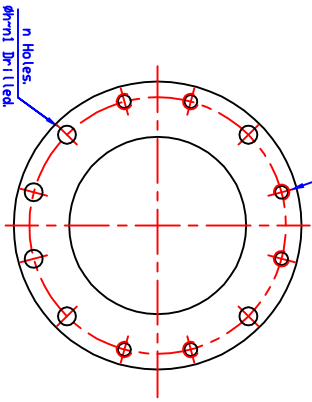





SUPPLIED WITH 8 MILS AMERLOCK 2 RED OXIDE EPOXY INTERIOR AND EXTERIOR OF THE VALVE

REFERENCE ONLY

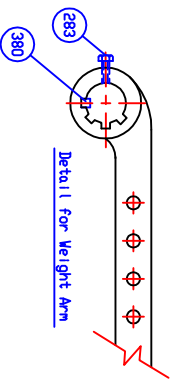

Marking  
 SIZE (INCH)  
 CCNE  
 200 CWP  
 ANWA C508  
 SERIES 9000

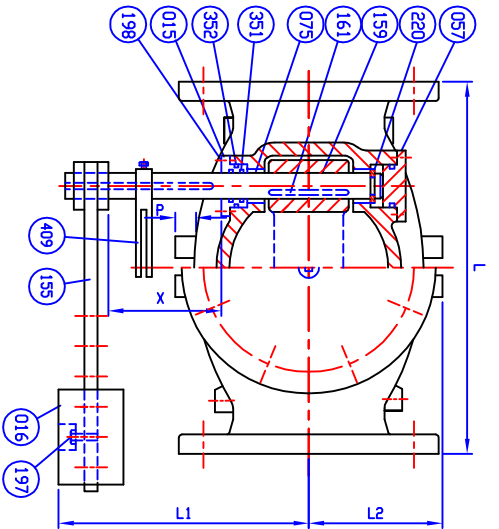

YEAR  
 SCI  
 POURING DATE

SIZE	ANSI B16.1 CL. 125	ØS	E	H	H1	H2	I	J	K	M	N	N1	n1	n2	D	P	A	X	L1	L2	Plug Size
3 (80)	11 7 1/2	6 3/4	4 3/4	1 13/16	6 3/8	3 3/4	18	3/4	1 1/2	3	2 1/2	1/2x13<(UNC)	—	—	4	3/4	5	5.5	10 3/4	4	1/2
4 (100)	13	9 7/2	3/4	8 15/16	1 1/8	13/16	7 3/8	4 1/2	19 7/8	3/4	1 1/2	1/2x13<(UNC)	—	—	4	3/4	5	5.75	11 1/2	4 7/16	1/2
6 (150)	16	11 9 1/2	7/8	8	1 1/8	1 13/16	9 3/16	5 1/2	22 5/8	3/4	1 1/2	1/2x13<(UNC)	—	—	4	3/4	5	6	12 7/8	5 3/4	3/4
8 (200)	19 1/2	13 3/2	1 1/4	8 1 1/8	1 3/8	1 13/16	10 7/8	6 3/4	29 7/8	7/8	1 3/4	3/4x11<(UNC)	—	—	5	1 1/4	5.5	7	15 5/8	7 7/8	3/4
10 (250)	22	16 14 1/4	1 1/2	12 1 3/16	2 1/8	2 1/2	13 3/16	8	35	7/8	3 1/2	3/4x11<(UNC)	7/8x9<(UNC)	6	5	1 1/4	6.08	7.75	17 7/8	9 7/16	1
12 (300)	26	19 17	1 3/4	12 1 1/4	2 1/2	2 3/2	15 3/16	9 1/2	40 3/8	7/8	3 3/2	3/4x11<(UNC)	—	—	5	1 1/4	5.47	8.75	20 7/8	10 3/4	1

- Dimensions in inches.

Remark - Part No. (024) Seat Holder

Size 3'-6" → Cast Iron, A126 Class B

Size 8'-12" → Ductile Iron, A536 Gr. 65-45-12

PARTS	MATERIAL	ASTM DESIGNATION	QTY
S25 Tear Drop Bolt	Zinc Coated Steel	A 307 Grade B	1
409 Tear Drop	Ductile Iron	A 536 Gr. 65-45-12	1
380 Key B	Stainless Steel	A 276 Type 304	2
352 D-Ring C	Rubber (Buna N)	D 2000 BK 707	2
351 D-Ring B	Rubber (Buna N)	D 2000 BK 707	2
324 Cover Gasket	Rubber (Buna N)	D 2000 BK 807	1
302 Cover Bolt	Zinc Coated Steel	A 307 Grade B	1set
283 Arm Bolt	Zinc Coated Steel	A 307 Grade B	1
220 Snap Ring	Stainless Steel	—	1
198 End Plate Bolt	Zinc Coated Steel	A 307 Grade B	2set
197 Weight Bolt	Zinc Coated Steel	A 307 Grade B	1
188 Disc Seat Bolt	Stainless Steel	A 276 Type 304	1set
166 Plug	Nonleakable Iron	A 47	1
161 Key A	Stainless Steel	A 276 Type 304	1
159 Hinge Pin	Stainless Steel	A 276 Type 304	1
075 Weight Arm	Ductile Iron	A 536 Gr. 65-45-12	1
062 Disc Seat Ring	Bronze	B 62	2
061 Body Seat Ring	Rubber (Buna N)	D 2000 BK 807	1
057 End Plate B	Ductile Iron	A 536 Gr. 65-45-12	1
038 Stopper	Stainless Steel	A 276 Type 304	1
024 Seat Holder	See Remark	—	1
015 Weight	Cast Iron	A 126 Class B	1
014 End Plate A	Bronze	B 62	1
003 Cover	Cast Iron	A 126 Class B	1
001 Disc	Ductile Iron	A 536 Gr. 65-45-12	1
001 Body	Cast Iron	A 126 Class B	1

HYDRD SHELL	400	PSI
HYDRD VALVE SEAT <td>200 <th>PSI</th> </td>	200 <th>PSI</th>	PSI
HYDRD BACK SEAT <td>— <th>PSI</th> </td>	— <th>PSI</th>	PSI
AIR SEAT <td>— <th>PSI</th> </td>	— <th>PSI</th>	PSI
STEAM <td>— <th>PSI</th> </td>	— <th>PSI</th>	PSI
WORKING PRESSURE <td>200 <th>PSI</th> </td>	200 <th>PSI</th>	PSI
TEST PRESSURE <td>— <th>PSI</th> </td>	— <th>PSI</th>	PSI

# HENRY PRATT - CCNE

401 S. HIGHLAND AVE. AUBURN, IL 62006  
 PHONE: 630.844.4001 FAX: 630.844.4124  
 DR. JON COLPANI DATE 10/19/10 REF. DIM. USA1349D  
 N.T.S. DRG. PPR. EDR.

SIZE 3" TO 12" SWING CHECK VALVE ANWA C508  
 BRONZE BODY SEAT RING & BUNA N DISC SEAT RING  
 WITH ONE LEVER AND WEIGHT

TYPE: 9001AB1LW HP90001 REV.