


A.V. SIZE	COMBO MODEL	ANTI-SHOCK MODEL	AIR VACUUM MODEL	A	B
4"	WAVASD40G-150F-FS	WAVAS40G-FS	WAV40-150F-FS	24-1/8"	12"
6"	WAVASD60G-150F-FS	WAVAS60G-FS	WAV60-150F-FS	30-1/6"	14"
8"	WAVASD80G-150F-FS	WAVAS80G-FS	WAV80-150F-FS	36-1/16"	18"
10"	WAVASD100G-150F-FS	WAVAS100G-FS	WAV100-150F-FS	46-1/2"	20"
12"	WAVASD120G-150F-FS	WAVAS120G-FS	WAV120-150F-FS	49-1/4"	24"
14"	WAVASD140G-150F-FS	WAVAS140G-FS	WAV140-150F-FS	53-3/4"	27"
16"	WAVASD160G-150F-FS	WAVAS160G-FS	WAV160-150F-FS	58-5/8"	30-1/2"
20"	WAVASD200G-150F-FS	WAVAS200G-FS	WAV200-150F-FS	71-5/8"	38-1/4"

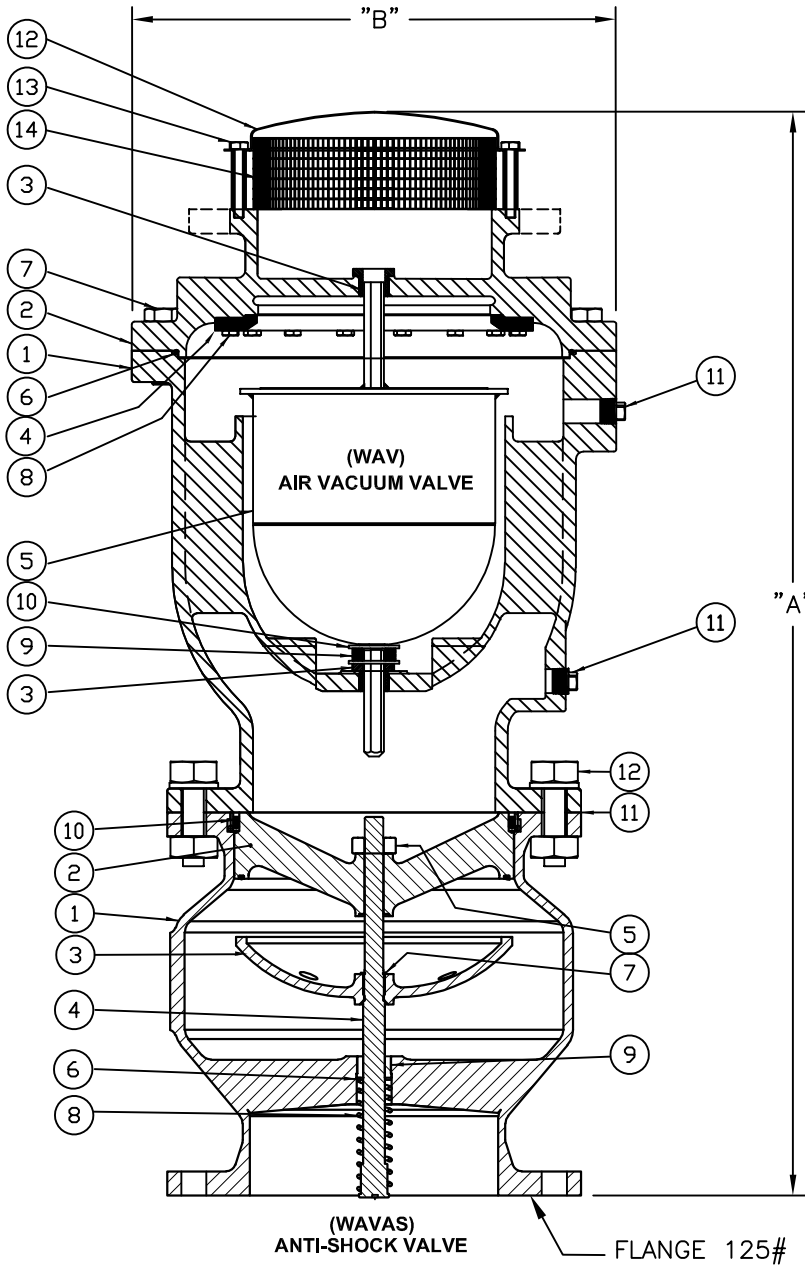

AIR VACUUM VALVE (WAV)		
ITEM	DESCRIPTION	MATERIAL
1	BODY	DUCTILE IRON ASTM A536 (65-45-12)
2	COVER	DUCTILE IRON ASTM A536 (65-45-12)
3	BUSHING	STAINLESS STEEL 316
4	SEAT	EPDM
5	FLOAT	STAINLESS STEEL 316
6	O-RING	EPDM
7	COVER BOLT	STAINLESS STEEL 316
8	SHOULDER SCREW	STAINLESS STEEL 316
9	CUSHION BUMPER	EPDM
10	WASHER	STAINLESS STEEL 316
11	1" PIPE PLUG	STAINLESS STEEL 316
12	HOOD	CARBON STEEL
13	HOOD BOLT	STAINLESS STEEL 316
14	SCREEN	CARBON STEEL

ANTI-SHOCK VALVE (WAVAS)		
ITEM	DESCRIPTION	MATERIAL
1	BODY	DUCTILE IRON ASTM A536 (65-45-12)
2	SEAT/SEAL	STAINLESS STEEL 304/EPDM
3	DISC	STAINLESS STEEL 304
4	STEM	STAINLESS STEEL 304
5	STEM COLLAR	STAINLESS STEEL 316
6	INT/SNAP RING	STAINLESS STEEL 304
7	EXT/SNAP RING	STAINLESS STEEL 304
8	SPRING	STAINLESS STEEL 316
9	GUIDE BUSHING	BRONZE ASTM B-584
10	SEAT HARDWARE	STAINLESS STEEL 316
11	FLG. GASKET	EPDM
12	HARDWARE	STAINLESS STEEL 316

3	7/2/2018	UPDATED GA	LF	
2	2/22/18	UPDATED GA	JUR	SS
1	9/13/17	UPDATED GA	RTF	JUR
REV	DATE	DESCRIPTION	DWN	APP

PRATT

4"-20" WAVASD DUAL BODY
COMBINATION AIR VACUUM AND
ANTI-SHOCK CHECK VALVE (150 PSI)

SCALE NONE DATE 3/6/14

DRAWN BY JUR CHECKED BY

APPROVED GA=BORDER

DRWG. NO. GA-11915 REV 3 A/C

NOTES:

1. ANTI-SHOCK SEAT RETAINER SCREWS AND AIR VACUUM VALVE MUST BE FASTENED AS SHOWN AT ALL TIMES FOR SAFE OPERATION.