


VALVE SIZE	ORIFICE SIZE	MAX C.W.P	INLET CONNECTION	W	H	HC	PRATT PN	WT. LBS
6"	6"	150	125# FLG	21"	18-3/4"	20-1/2"	WCV60-038-150F-FS	231
6"	6"	300	250# FLG	21"	18-3/4"	20-1/2"	WCV60-732-300F-FS	231
8"	8"	150	125# FLG	25"	21-11/16"	23-11/16"	WCV80-038-150F-FS	373
8"	8"	300	250# FLG	25"	21-11/16"	23-11/16"	WCV80-732-300F-FS	373

ITEM	DESCRIPTION	MATERIAL
1	BODY	DUCTILE IRON A536 (65-45-12)
2	COVER	DUCTILE IRON A536 (65-45-12)
3	BUSHING	316SS
4	SEAT	EPDM
5	FLOAT	316SS
6	GASKET	NON-ASBESTOS FIBER
7	COVER BOLT	316SS
8	SHOULDER SCREW	316SS
9	CUSHION BUMPER	EPDM
10	WASHER	316SS
11	FLOAT RETAINER	316SS
12	LOCK WASHER	316SS
13	LOCK WASHER	316SS
14	LOCK NUT	316SS
15	FLOAT	316SS
16	LONG LEVER ARM	316SS
17	ARM LINK	316SS
18	SHORT LEVER ARM	316SS
19	BUTTON	EPDM/316SS
20	PIVOT PIN & RETAINING RING	316SS/17-7 PH SS
21	POSITIONING PIN	420SS
22	POSITIONER	316SS
23	LEVER BRACKET	316SS
24	SEAT	316SS
25	1" PIPE PLUG	316SS
26	HOOD	CARBON STEEL
27	HOOD BOLT	STAINLESS STEEL
28	SCREEN	STAINLESS STEEL
29	VENT CAP	DUCTILE IRON A536 (65-45-12)

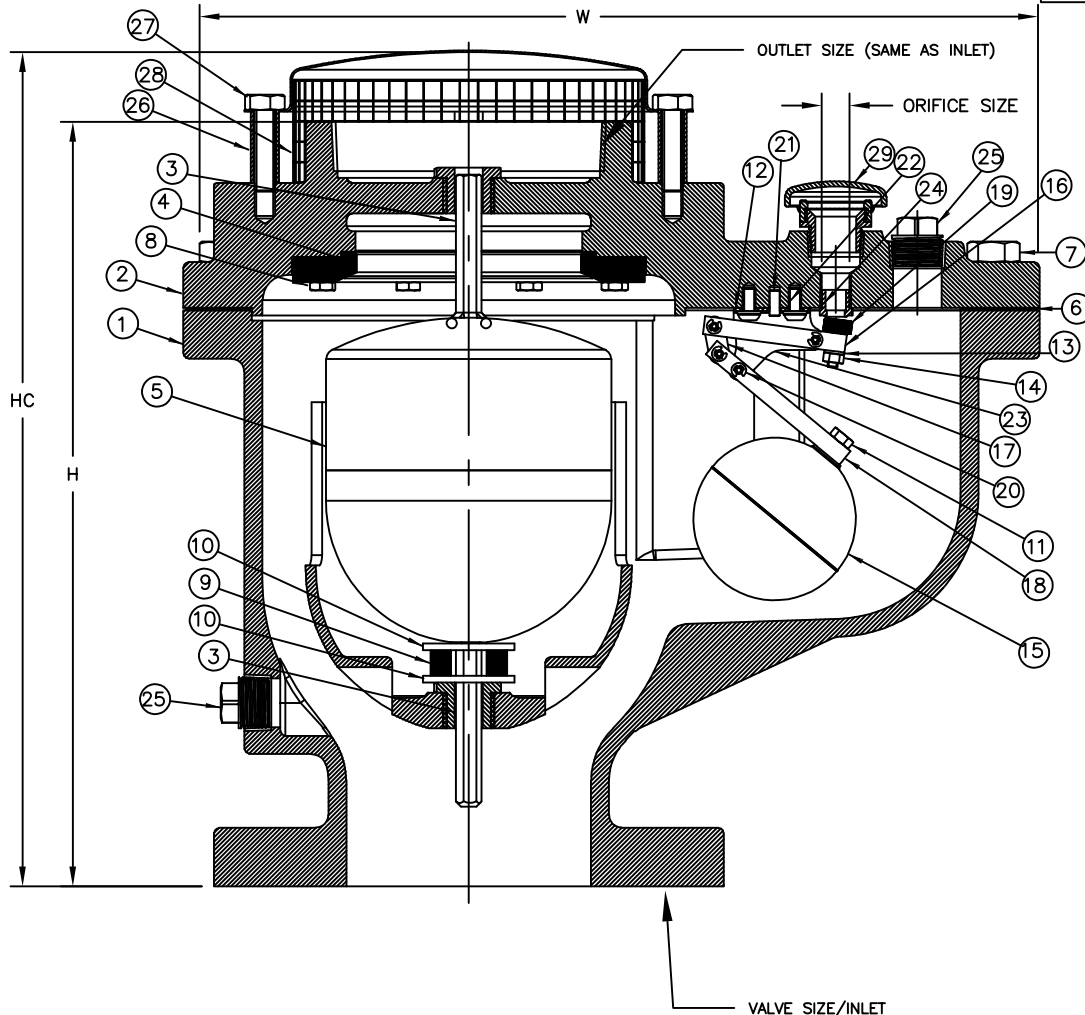

1	2/22/18	REVISED PN'S/ MATERIAL ADDED NOTES	JUR	SS
REV	DATE	DESCRIPTION	DWN	APP
<b>PRATT®</b>				
6" & 8" WCV SINGLE BODY COMBINATION WATER AIR VACUUM VALVE 125# FLG/250# FLG				
SCALE		NONE	DATE 8/10/17	
DRAWN BY		DSL	CHECKED BY RF	
APPROVED		GA=BORDER		
DRWG. NO.	GA-12415	REV 1	AC	