


A.V. SIZE	ANTI-SHOCK MODEL	AIR VACUUM MODEL	COMBO MODEL	A	B
2"	WAVAS20G-FS	WAV20-300-FS	WAVASD20G-150F-FS	19-1/2"	9-9/16"
3"	WAVAS30G-FS	WAV30-300-FS	WAVASD30G-150F-FS	23-1/4"	9-1/2"

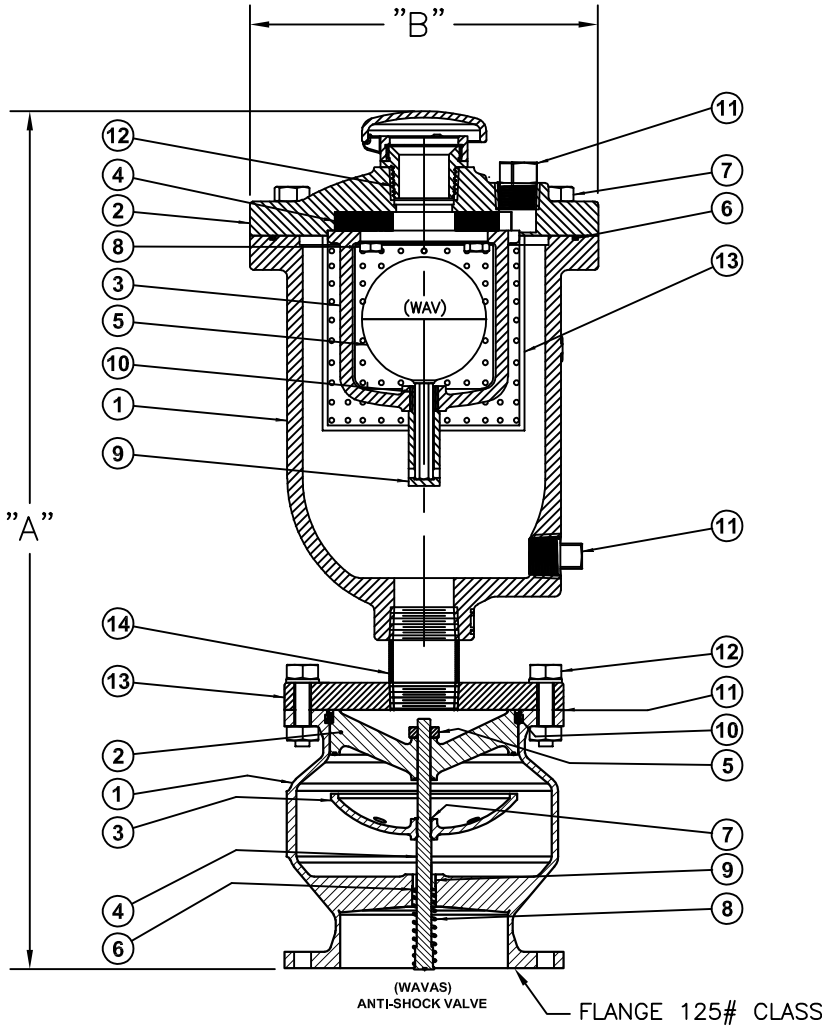

AIR VACUUM VALVE (WAV)		
ITEM	DESCRIPTION	MATERIAL
1	BODY	DUCTILE IRON ASTM A536 (65-45-12)
2	COVER	DUCTILE IRON ASTM A536 (65-45-12)
3	BAFFLE	DUCTILE IRON ASTM A536 (65-45-12)
4	SEAT	EPDM
5	FLOAT	STAINLESS STEEL 316
6	O-RING	EPDM
7	COVER BOLT	STAINLESS STEEL 316
8	BAFFLE BRACKET BOLT	STAINLESS STEEL 316
9	GUIDE BUSHING	STAINLESS STEEL 316
10	GUIDE SHAFT	STAINLESS STEEL 316
11	1/2" PIPE PLUG	STAINLESS STEEL 316
12	VENT CAP/SCREEN	DUCTILE IRON/SS 316
13	DIFFUSER	STAINLESS STEEL 316

ANTI-SHOCK VALVE (WAVAS)		
ITEM	DESCRIPTION	MATERIAL
1	BODY	DUCTILE IRON ASTM A-536 (65-45-12)
2	SEAT/SEAL	STAINLESS STEEL 304 / EPDM
3	DISC	STAINLESS STEEL 304
4	STEM	STAINLESS STEEL 304
5	STEM COLLAR	STAINLESS STEEL 316
6	INT/SNAP RING	STAINLESS STEEL 304
7	EXT/SNAP RING	STAINLESS STEEL 304
8	SPRING	STAINLESS STEEL 316
9	GUIDE BUSHING	BRONZE ASTM B-584
10	SEAT HARDWARE	STAINLESS STEEL 316
11	FLG. GASKET	EPDM
12	HARDWARE	STAINLESS STEEL 316
13	FLANGE	STEEL
14	PIPE NIPPLE	GALV. / SCH 40

NOTES:

1. ANTI-SHOCK SEAT RETAINER SCREWS AND AIR VACUUM VALVE MUST BE FASTENED AS SHOWN AT ALL TIMES FOR SAFE OPERATION.

REV	DATE	DESCRIPTION	DWN	APP
1	7/2/2018	UPDATED GA	LF	
PRATT®				
2"-3" WAVASD DUAL BODY COMBINATION AIR VACUUM AND ANTI-SHOCK CHECK VALVE (150 PSI)				
SCALE NONE		DATE 2/12/18		
DRAWN BY JUR		CHECKED BY		
APPROVED SS		GA=BORDER		
DRWG. NO.	GA-12445	REV	1	A/C