


PRATT®

a MUELLER brand

MULTI-PORT PLUG VALVE

Engineering Creative Solutions for Fluid Systems Since 1901

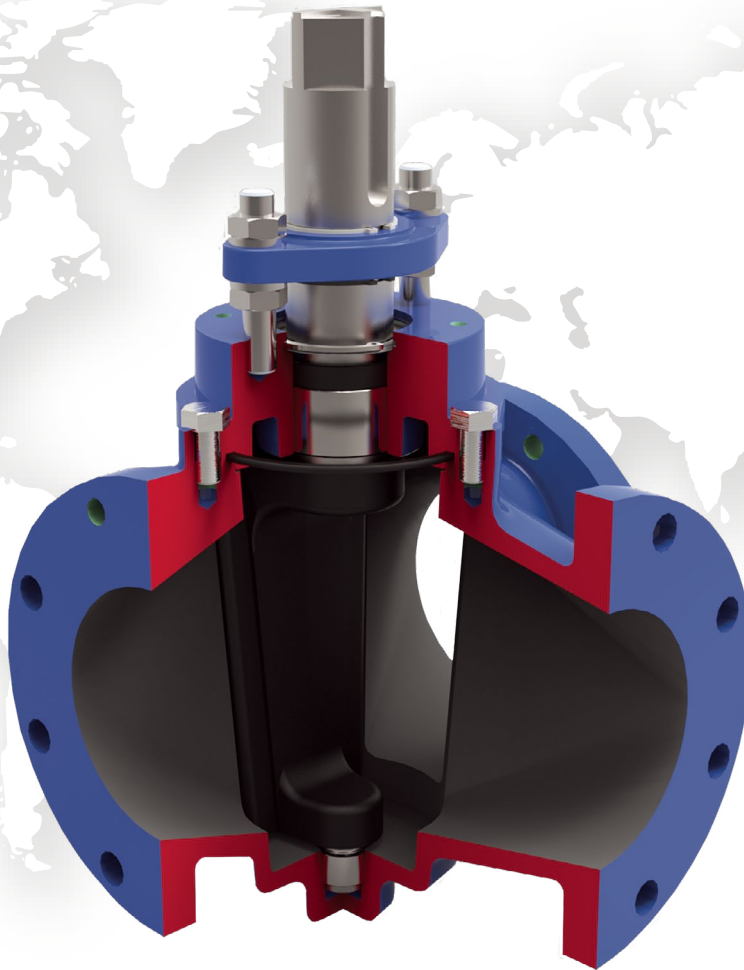

MUELLER

PRATT®

a MUELLER brand

PRATT® MULTI-PORT PLUG VALVE

Quality, reliability, safety and value are the criteria embodied in the Pratt Multi-Port plug valve.

High quality manufacturing processes from advanced CAD engineering to CNC machining ensure reliable operation with high flow capability.

The Pratt Multi-Port plug valve is designed for regulation, diversion and isolation of water (clean or dirty) and sludge and slurries. The single tapered plug design can be arranged to provide a wide selection of flow configurations.

High flow and large solids passage is a key feature of the Pratt Multi-Port plug valve; a 3" round solid can pass through a 4" valve without compression.

Although the regular usage of a Pratt Multi-Port valve is for flow diversion applications, the valve can provide tight shut-off, which is factory set when requested at order placement. (Not available with double-style plug or on 14" and 16" valves).

BODY & SEAT

The Pratt Multi-Port plug valve body is a high integrity casting in cast iron ASTM A126 Class B. The precision machined, internal tapered surface of the body is the valve seat which is provided with a corrosion and erosion resistant epoxy coating. Other materials are available.

END CONNECTIONS

The 3-flanges are to ASME / ANSI B16.1 Class 125 flat faced.

Certain sizes of valve require some tapped bolt holes because of limited access for nuts behind the flange, details are shown on page 5.

PLUG

The ductile iron plug is totally encapsulated (3" thru 16") with a molded and vulcanized elastomer providing sealing and tight shut-off (except for 14" & 16" and double style plugs). For tight shut-off applications, it is advisable that the flow is against the rear of the plug. Tight shut-off not available with double-style plug or on 14" and 16" valves.

A large-diameter stem and upper and lower trunnion are integral with the plug casting. The upper end of the stem has a 2" square drive for wrench operation and also 2 keyways for maximum versatility when mounting gear operators. A cast marking on the end of the shaft indicates the plug face orientation.

The single style plug is standard in the Pratt Multi-Port plug valve to provide straight-through and 90° flow paths. A double-style plug is optionally available upon request (not tight shut-off).

BEARINGS

The plug rotates in permanently lubricated, corrosion resistant stainless steel bearings in the body and bonnet.

BONNET SEAL

The bolted bonnet is assembled in a precision location in the body and uses superior 'O'-Ring sealing, with metal to metal contact, providing lower stress compared to traditional gaskets.

STEM SEAL

Multiple self-adjusting U-cup seals provide positive stem sealing with trouble-free service.

OPERATION


Manual operation by lever or gear available on all sizes. Chainwheel operation is also available.

Electric or pneumatic actuation is available on request.


COATING

The valve interior and exterior surfaces are coated with 10-12 mils of 2-Part epoxy.


AVAILABLE FLOW PATHS

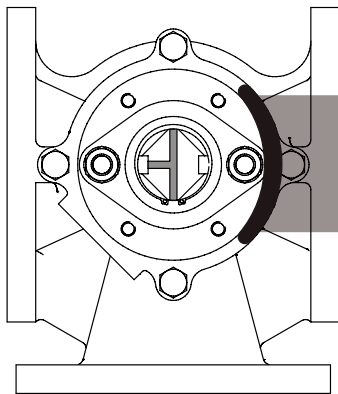


VALVE IN CLOSED POSITION*

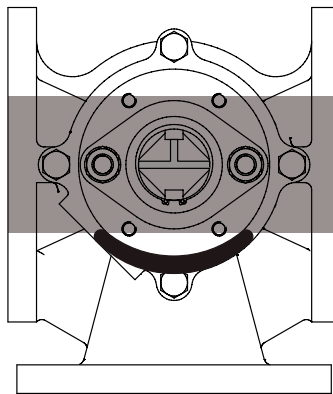


FLOW STRAIGHT THROUGH VALVE

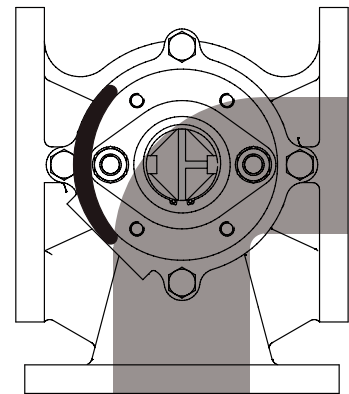

FLOW THROUGH 90° TO SIDE PORT

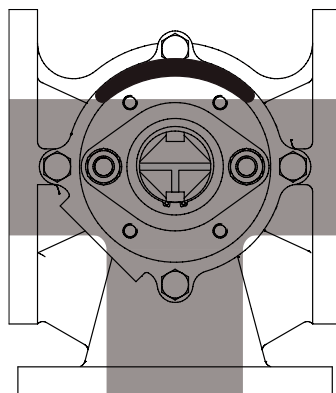

ALL 3 PORTS CONNECTED AND OPEN

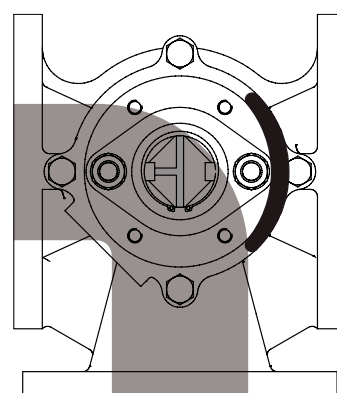

FLOW THROUGH 90° TO SIDE PORT

*It is advisable that the flow is against the rear side of the plug for tight shut-off applications. Not available with double-style plug.

PRESSURE / TEMPERATURE RATINGS

Flange rating to ASME / ANSI B16.1 Class 125, the maximum cold working pressure for all sizes is 175 psi.

The operating temperature of the valve may depend on the elastomer used for the plug and seals. Refer to the elastomer selection guide on page 4.

INSTALLATION

The Pratt® Multi-Port plug valve can be installed in any orientation although it is advisable to have the valve stem vertical for ease of access.


If the valve has been supplied for tight shut-off, the flow path and therefore the upstream pressure should be against the rear side of the plug.

IN-LINE MAINTENANCE

In the unlikely event of gland leakage, the stem seals can be replaced without removing the bonnet. Access to the inside of the body for inspection or cleaning does not require removal of the valve from the line.

If wear should occur between the plug face and the seat, the plug can be adjusted externally.

STANDARD MATERIALS OF CONSTRUCTION - 3" TO 16"

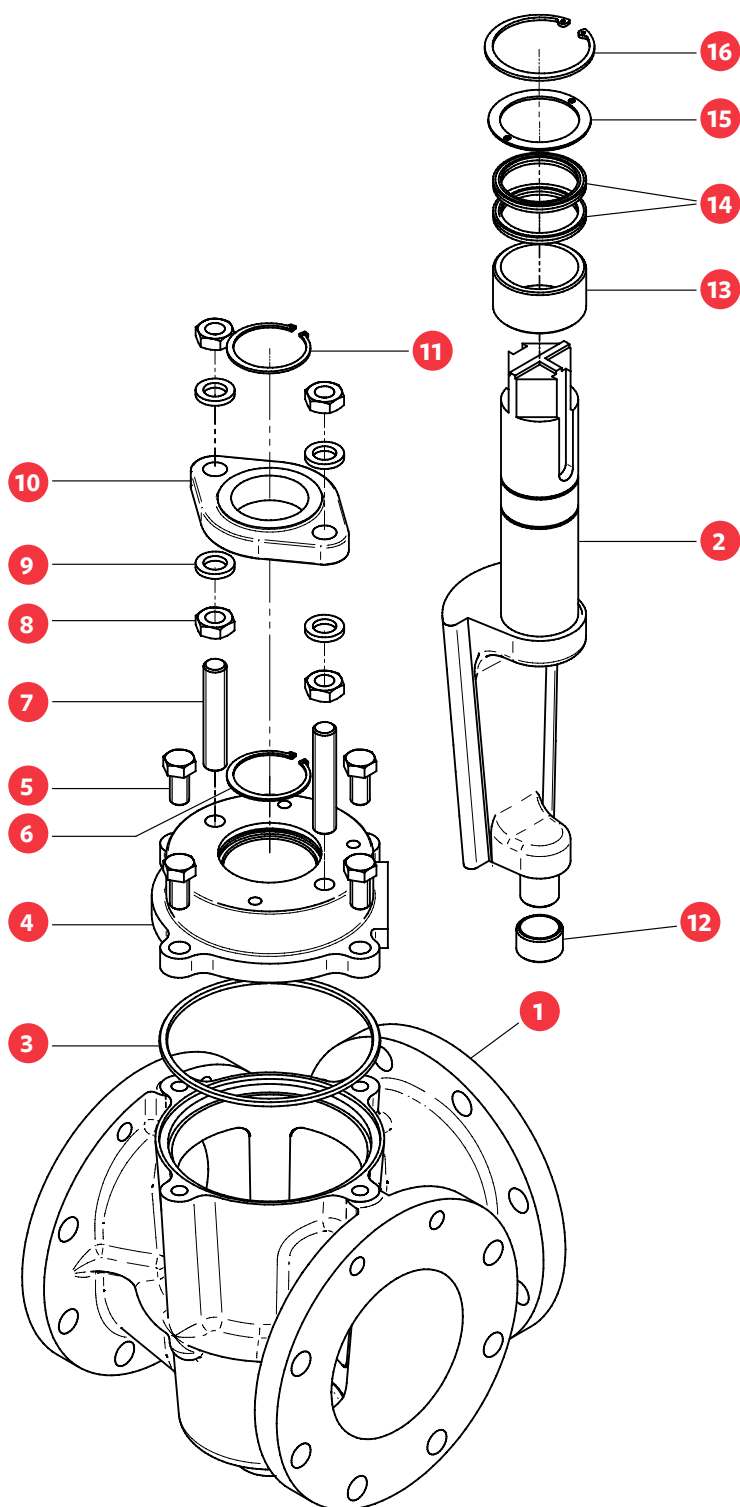

ITEM	COMPONENT	MATERIAL
1	Body	Cast Iron A126 Class B
2	Plug	Ductile Iron ASTM A536 Rubber Coated
3	Bonnet O-Ring	Elastomer as Specified
4	Bonnet	Cast Iron A126 Class B
5	Setscrew	Steel - Zinc Plated
6	Snap Ring - Internal	Steel
7	Stud	Steel - Zinc Plated
8	Nut	Steel - Zinc Plated
9	Washer	Steel - Zinc Plated
10	Gland	Ductile Iron ASTM A536
11	Snap ring - Internal	Steel
12	Journal Bearing	Stainless Steel
13	Journal Bearing	Stainless Steel
14	'U' Cup Seal	Elastomer as Specified
15	Seal Retaining Ring	Brass
16	Snap Ring - External	Steel

ELASTOMERS AVAILABLE FOR PRATT® MULTI-PORT PLUG VALVES

NBR - NITRILE

A general purpose material sometimes referred to as Buna-N with a temperature range -20°F to 212°F. Used on sewage, water, air, hydrocarbon and mineral oils.

EPDM

An excellent polymer for use on chilled water through to LP steam applications, having a temperature range of -20°F to 250°F. Resistance to many acids, alkalis, detergents, phosphate esters, alcohols and glycols is an added benefit. Use on hydrocarbons must be avoided.

CR - NEOPRENE

This versatile material shows outstanding resistance to abrasion and ozone. Chemical resistance to a wide range of petroleum based products and dilute acids and alkalis. Temperature range -20°F to 225°F.

FKM - VITON®

Retention of mechanical properties at high temperature is an important feature of this elastomer: temperature range is -10°F to 300°F. It also has excellent resistance to oils, fuels, lubricants and most mineral acids and aromatic hydrocarbons. NOT suitable for water or steam applications.

ELASTOMER SELECTION CHART

SERVICE	ELASTOMER	AVERAGE USEFUL TEMP. RANGE	SERVICE	ELASTOMER	AVERAGE USEFUL TEMP. RANGE	SERVICE	ELASTOMER	AVERAGE USEFUL TEMP. RANGE
Acetone	EPDM	-35°F to 250°F	Cement Slurry	EPDM	-35°F to 250°F	Oil, Animal	Nitrile	-20°F to 212°F
Alcohol AMYL	EPDM	0°F to 212°F	Copper Sulphate	EPDM	-35°F to 250°F	Oil, Mobil Therm Light	Viton	10°F to 250°F
Alcohol Aromatic	Viton	10°F to 250°F	Creosote (Coal)	Nitrile	-20°F to 212°F	Oil, Mobil Therm 600	Viton	10°F to 250°F
Alcohol Butyl	Neoprene	-20°F to 225°F	Coal Slurry	Nitrile	-20°F to 212°F	Oil, Mobil Therm 603	Nitrile	-20°F to 212°F
Alcohol Denatured	Nitrile	-20°F to 212°F	Diesel Fuel No. 3	Nitrile	-20°F to 212°F	Oil, Lubricating	Nitrile	-20°F to 212°F
Alcohol Ethyl	EPDM	-20°F to 250°F	Diethylene Glycol	EPDM	-35°F to 250°F	Oil, Vegetable	Nitrile	-20°F to 212°F
Alcohol Grain	Nitrile	-20°F to 212°F	Ethylene Glycol	EPDM	-35°F to 250°F	Paint, Latex	Nitrile	-20°F to 212°F
Alcohol Isopropyl	Neoprene	-20°F to 225°F	Fatty Acid	Nitrile	-20°F to 212°F	Phosphate Ester	EPDM	-35°F to 250°F
Alcohol Methyl	EPDM	-20°F to 250°F	Fuel Oil No. 2	Nitrile	-20°F to 212°F	Propane	Nitrile	-20°F to 212°F
Ammonia Anhydrous	Neoprene	-20°F to 225°F	Fertilizer Liquid H ₂ N ₂ O ₂	EPDM	-35°F to 250°F	Rape Seed Oil	EPDM	-35°F to 250°F
Ammonium Nitrate	EPDM	-20°F to 250°F	Gasoline Keg	Nitrile	-20°F to 212°F	Sewage with Oils	Nitrile	-20°F to 212°F
Ammonia, Water	EPDM	-20°F to 250°F	Gas Natural	Nitrile	-20°F to 212°F	Sodium Hydroxide 20%	EPDM	-35°F to 250°F
Animal Fats	Nitrile	-20°F to 212°F	Glue, Animal	Nitrile	-20°F to 212°F	Starch	EPDM	-35°F to 250°F
Black Liquor	EPDM	-20°F to 250°F	Green Liquor	EPDM	-20°F to 212°F	Steam to 250°F	EPDM	-35°F to 250°F
Blast Furnace Gas	Neoprene	-20°F to 225°F	Hydraulic Oil (Petro)	Nitrile	-20°F to 212°F	Stoddard, Solvent	Nitrile	-20°F to 80°F
Butane	Nitrile	-20°F to 212°F	Hydrogen	Nitrile	-20°F to 212°F	Sulphuric Acid 10% 50%	Neoprene	-20°F to 158°F
Bunker Oil "C"	Nitrile	-20°F to 212°F	JF4, JP5	Viton	-20°F to 212°F	Sulphuric Acid 100%	Viton	10°F to 300°F
Calcium Chloride	EPDM	-20°F to 250°F	Kerosene	Nitrile	0°F to 212°F	Trichloroethylene Dry	Viton	10°F to 300°F
Carbon Dioxide	EPDM	-20°F to 250°F	Ketone	EPDM	-35°F to 250°F	Triethanol Amine	EPDM	-35°F to 250°F
Carbon Monoxide (Cold)	Neoprene	-20°F to 150°F	Lime Slurry	EPDM	-35°F to 250°F	Varnish	Viton	10°F to 300°F
Carbon Monoxide (Hot)	Viton	10°F to 300°F	Methane	Nitrile	-20°F to 212°F	Water, Fresh	EPDM	-35°F to 250°F
Carbon Tetrachloride	Viton	10°F to 300°F	Methyl Ethyl Ketone	EPDM	-35°F to 250°F	Water, Salt	EPDM	-35°F to 250°F
Caustic Soda	EPDM	-35°F to 250°F	Naptha (Berzin)	Nitrile	-20°F to 212°F	Xylene	Viton	10°F to 300°F

NOTE: Above elastomer / temperature chart are guidelines only. Contact factory for specific applications.

PRESSURE RATING

SIZE	DRILLING	PRESSURE
3" to 16"	Class 125	175 psig

Body (Shell) Hydrotest = 1.5 x rated pressure

Seat hydrotest = 1.0 x rated pressure (for tight shut-off applications only)

ORDERING INFORMATION

VALVE TYPES	DESIGNATION
Class 125 Flanged Cast Iron	604
Class 125 Flanged Ductile Iron	614
Class 125 Flanged 316 Stainless Steel	604S

SEAT

Epoxy (604 / 614)	E
Stainless Steel (604S)	S

ELASTOMER TRIM

EPDM	0
Nitrile (Buna)	1
Viton	2
Neoprene	3

GEAR OPERATORS

Gearbox complete with handwheel	AGHW
---------------------------------	------


Available in 90°, 180°, 270° and 360° configurations.

STYLE

Available port positions as shown on page 8.

The style can be factory set and should be requested at time of order.

DIMENSIONAL DATA FOR PRATT® MULTI-PORT PLUG VALVE

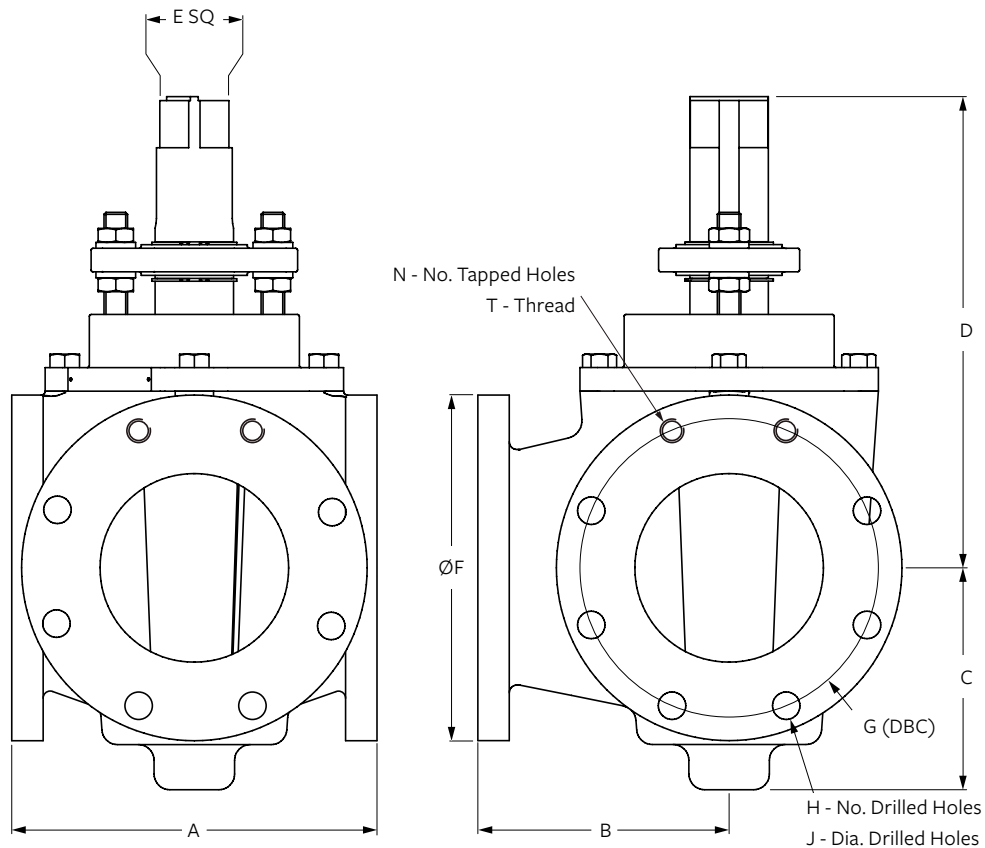

FLANGED END - FIG. 604 - CLASS 125


	DIMENSIONS IN				NOMINAL VALVE SIZE			
	3"	4"	6"	8"	10"	12"	14"	16"
A	8	9.88	11.63	13.88	16.75	19	21	23.75
B	5.5	6.5	8	9	11	11.56	12.5	15.13
C	4.81	5.94	7.06	10.94	10.94	12.88	14.19	14.75
D	9.04	13.36	15.04	18.69	18.69	21.20	21.10	22.00
E	1*	2	2	2	2	2	2	2
F	7.50	9.00	11.00	13.50	16.00	19.00	21.00	23.50
G	6.00	7.50	9.50	11.75	14.25	17.00	18.75	21.25
H	4	6	6	4	12	12	10	16
J	0.75	0.75	0.88	0.88	1	1	1.13	1.13
N	-	2	2	4	-	-	2	-
T	-	5/8" - 11 UNC	3/4" - 10 UNC	3/4" - 10 UNC	-	-	1" - 8 UNC	-
Weight - lb	65	120	170	325	380	475	850	970

Note:

Drawings are for information purposes only; please request certified drawings before preparing piping drawings.

* Adaptor available to convert to 2" Nut.

DIMENSIONAL DATA FOR PRATT® MULTI-PORT PLUG VALVE WITH HANDWHEEL

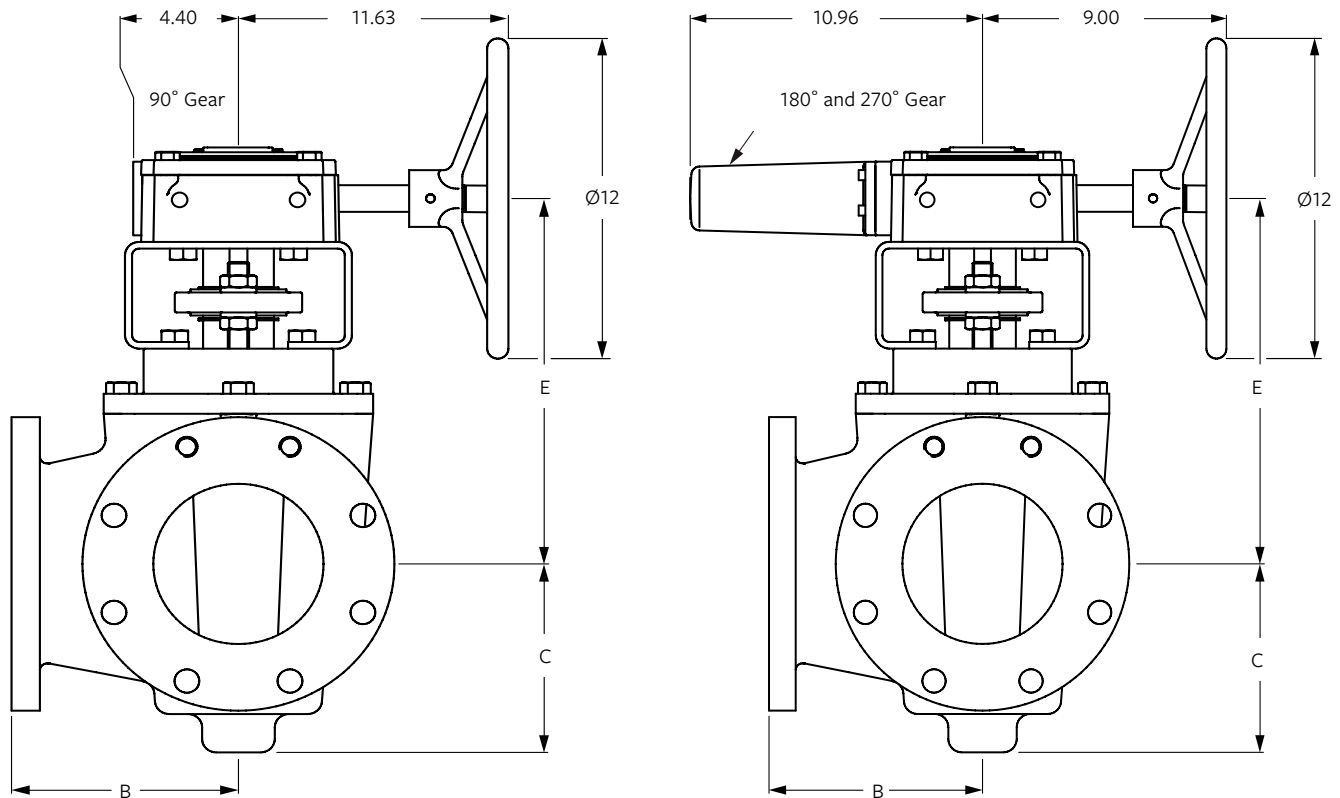

FLANGED END - FIG. 604AGHW - CLASS 125

DIMENSIONS IN

NOMINAL VALVE SIZE

	4"	6"	8"	10"	12"	14"	16"
A*	9.88	11.63	13.88	16.75	19	21	23.75
B	6.50	8	9	11	11.56	12.50	15.13
C	5.94	7.06	10.94	10.94	12.88	14.19	14.75
E	12.94	14.06	17.75	17.75	19.50	20.38	21.06
Weight - lb	200	250	405	460	555	937	1053

Note:

3" gear operated valve details upon request.

Drawings are for information purposes only; please request certified drawings before preparing piping drawings.

* Face to face dimension and flange drilling see page 5.

ACCESSORIES

WRENCH

Wrench operators are available for all sizes (for tight shut-off, we recommend the use of a gear operator).

POWER OPERATION

Pneumatic, electric and hydraulic operation is available, complete with limit switches and solenoid valves when required.

STYLING RING (FOR WRENCH OPERATED VALVES)

The valve may be ordered with the plug positions pre-set at the factory to suit the port flow requirements. This is achieved by fitting a styling ring to the valve stem.

GEAR OPERATORS

Gear operators are available for all sizes.

They can be provided with 90°, 180° or 270° travel and are fitted with travel stops. 360° travel is also available.

LOCKING DEVICE

Factory fitted locking devices are available for wrench operated and gear operated valves.

DOUBLE-STYLE PLUG

To provide 90° flow paths only, a double-style plug is available which operates through 90° travel and isolates either straight-through port (Style A90 only).




STYLING RING



GEAR OPERATOR
(SHOWN WITH 180° / 270° GEAR)


PRATT® MULTI-PORT PLUG VALVE PORT POSITIONS

Port Positions Viewed From Above




3 way, 3 port, 180° turn

STYLE A180




3 way, 2 port, 90° turn

STYLE A90*




3 way, 3 port, 90° turn

STYLE C




3 way, 3 port, 90° turn

STYLE D




3 way, 3 port, 90° turn

STYLE E




3 way, 3 port, 90° turn

STYLE F

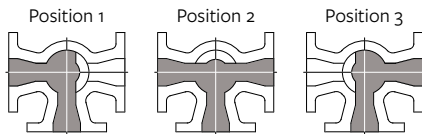


3 way, 3 port, 180° turn

STYLE G

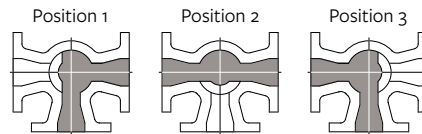


3 way, 3 port, 180° turn

STYLE H

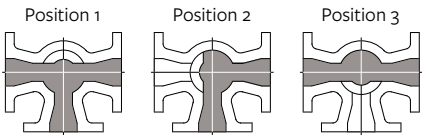


3 way, 3 port, 180° turn

STYLE I

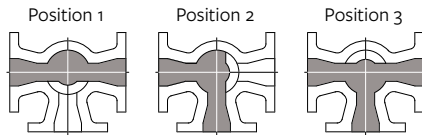


3 way, 3 port, 180° turn

STYLE J

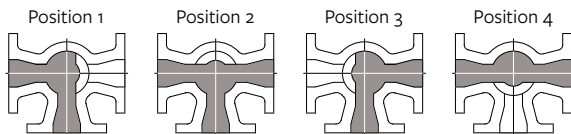


3 way, 3 port, 270° turn

STYLE K

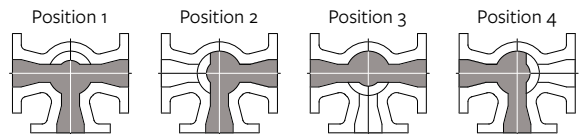


3 way, 3 port, 270° turn

STYLE L

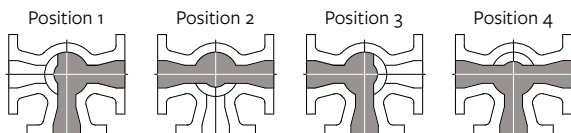

3 way, 3 port, 270° turn

STYLE M

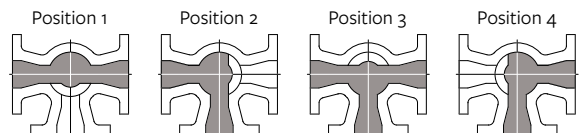

3 way, 3 port, 270° turn

STYLE N

* Requires Double-Style Plug. Not Tight Shut-Off. Consult Factory for Special Pricing and Availability.

HOW TO ORDER

When ordering Multi-Port plug valves, specify style letter of the port position required.

TECHNICAL SPECIFICATION

Multi-Port Plug Valves

Valves shall be of the Multi-Port non-lubricated concentric type with a totally encapsulated plug. The elastomer shall be suitable for the service intended.

Valve flanges shall comply with ASME / ANSI B16.1 Class 125, including facing, drilling and thickness. Valves shall be designed for a maximum working pressure of 175 CWP.

The valve body and bonnet shall be in cast iron to ASTM A126 Class B and the plug shall be ductile iron to ASTM A536 Grade 65-45-12. The axial position of the plug shall be held by the adjustable gland, and the valve shall operate without the need to lift the plug prior to turning.

Replaceable sleeve-type bearings, manufactured in oil-impregnated stainless steel shall be fitted in the body and bonnet. Stem seals shall be self-adjusting U-cup type and be replaceable without removing the bonnet from the valve.

The valve stem shall be provided with a 2" square nut for use with removable levers or extended T-handles. Wrench operated valves shall be capable of being converted to gear or automated operation without removing the bonnet from the valve.

Where required, gear operators shall be of heavy duty construction with a ductile iron quadrant supported by upper and lower oil-impregnated bronze bearings. The worm gear and shaft shall be manufactured in hardened steel and run in high efficiency roller bearings. Gear operators shall require single handwheel operation only.

Multi-Port plug valves shall be as manufactured by us.




NOTES

PRATT®

a **MUELLER** brand

PRATT®


Product Guide




MODEL 2FII




MONOFLANGE MKII




PLUG VALVES




TRITON® XR70




**INDICATING BUTTERFLY
VALVES UL & FM APPROVED**




**TILTING DISC
CHECK VALVES**




KNIFE GATE VALVES




**N-STAMP NUCLEAR
BUTTERFLY VALVES**




CONE VALVES




RECTANGULAR




**PIVA POST INDICATING VALVES
ASSEMBLY UL & FM APPROVED**




SLEEVE VALVES




**RUBBER SEATED
BALL VALVES**



TRITON® 250




CHECK VALVES




**METAL SEATED
BALL VALVE**



CONTROL SYSTEMS



INDUSTRIAL VALVES



AIR VALVES

For more information about us or to view our full line of water products, please visit www.prattvalve.com or call Pratt customer service at 1.800.423.1323.

Mueller refers to one or more of Mueller Water Products, Inc., a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, Jones®, Mi.Net®, Milliken®, Pratt®, Singer®, and U.S. Pipe Valve & Hydrant. Please see www.muellerwp.com/about to learn more.

Copyright © 2018 Henry Pratt Company, LLC. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Water Products, Inc., its affiliates or other third parties. Products marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(s).

F 13853 11/18

MUELLER