


VALVE SIZE	MAX C.W.P	INLET CONNECTION	OUTLET SIZE	W	H	HC	PRATT PN	WT. LBS
4"	150	125# FLG	4" THREADED OUTLET	12"	15-3/4"	16-7/8"	WAV40-150F-FS	104
4"	300	250# FLG	4" THREADED OUTLET	12"	15-3/4"	16-7/8"	WAV40-300F-FS	104
6"	150	125# FLG	6" NPT	14"	18-9/16"	20-5/16"	WAV60-150F-FS	158
6"	300	250# FLG	6" NPT	14"	18-9/16"	20-5/16"	WAV60-300F-FS	158
8"	150	125# FLG	8" NPT	18"	21-9/16"	23-9/16"	WAV80-150F-FS	284
8"	300	250# FLG	8" NPT	18"	21-9/16"	23-9/16"	WAV80-300F-FS	284

ITEM	DESCRIPTION	MATERIAL
1	BODY	DUCTILE IRON A536 65-45-12
2	COVER	DUCTILE IRON A536 65-45-12
3	GUIDE BUSHING	316SS
4	SEAT	EPDM
5	FLOAT	316SS
6	O-RING	EPDM
7	COVER BOLT	316SS
8	SHOULDER SCREW	316SS
9	CUSHION BUMPER	EPDM
10	WASHER	316SS
11	1" PIPE PLUG	316SS
12	HOOD	CARBON STEEL
13	HOOD BOLT	316SS
14	SCREEN	STAINLESS STEEL

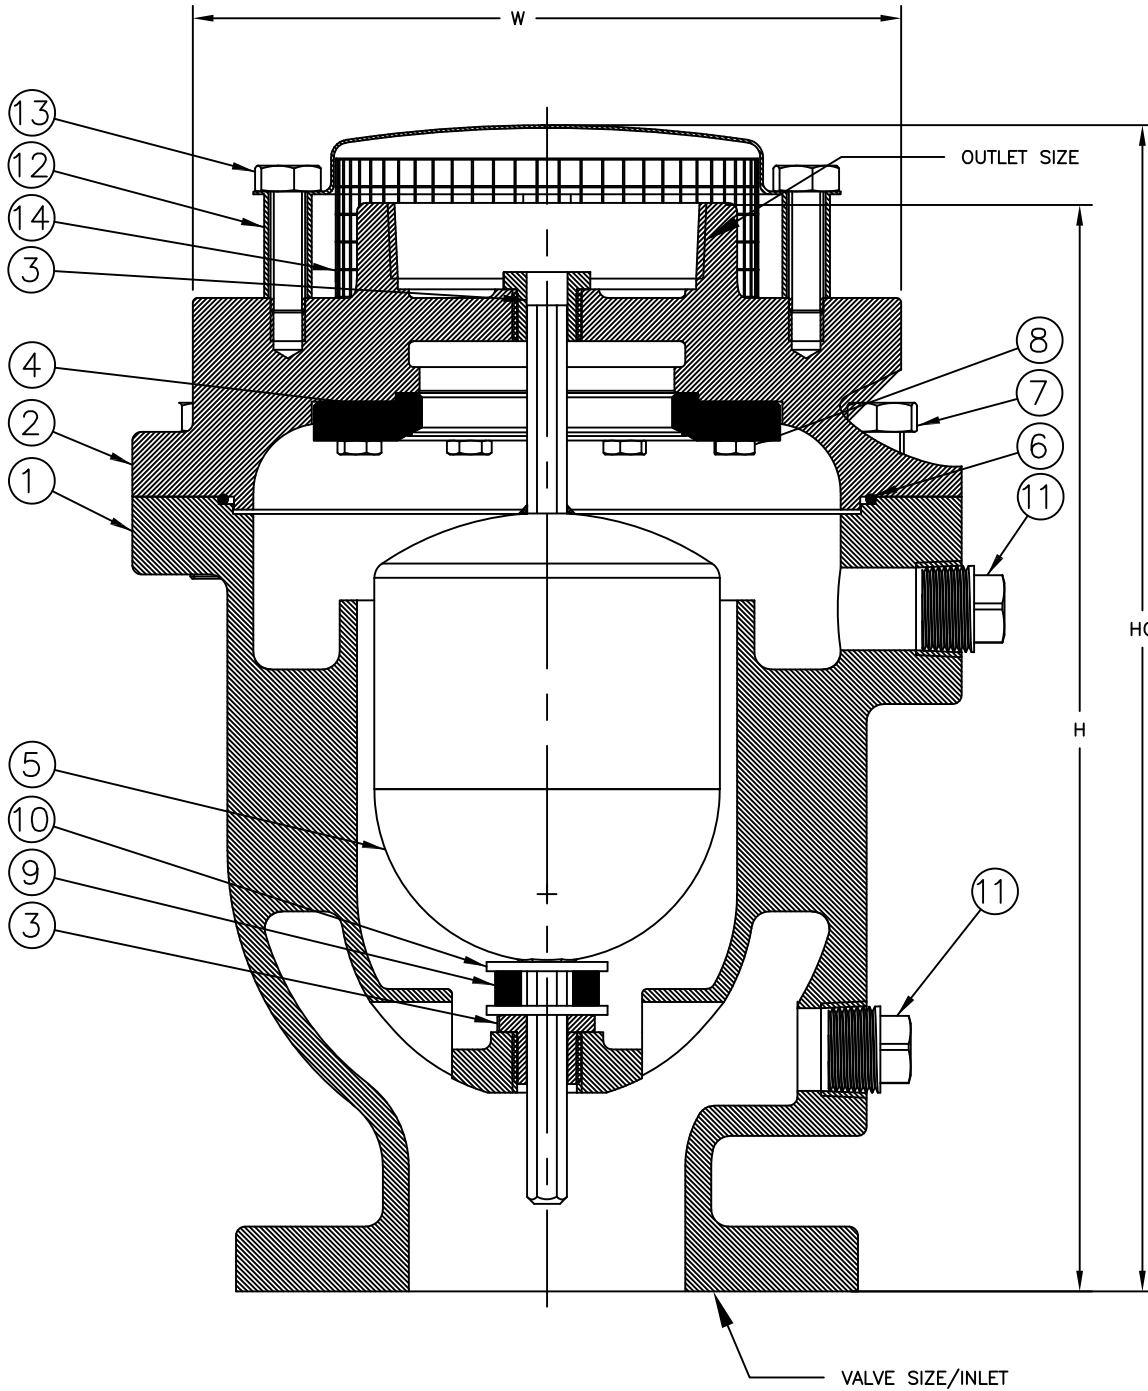

2	9/26/19	ADDED 250# FLG INLET CONNECTION TO EACH SIZE	TT	RF
1	2/22/18	REVISED PN'S/MATERIALS ADDED NOTES	JUR	SS
REV	DATE	DESCRIPTION	DWN	APP

PRATT

4" - 8" WAV AIR VACUUM VALVE

SCALE NONE DATE 8/10/17

DRAWN BY DSL CHECKED BY RF

APPROVED GA=BORDER

DRWG. NO. GA-12413 REV 2 A/C